


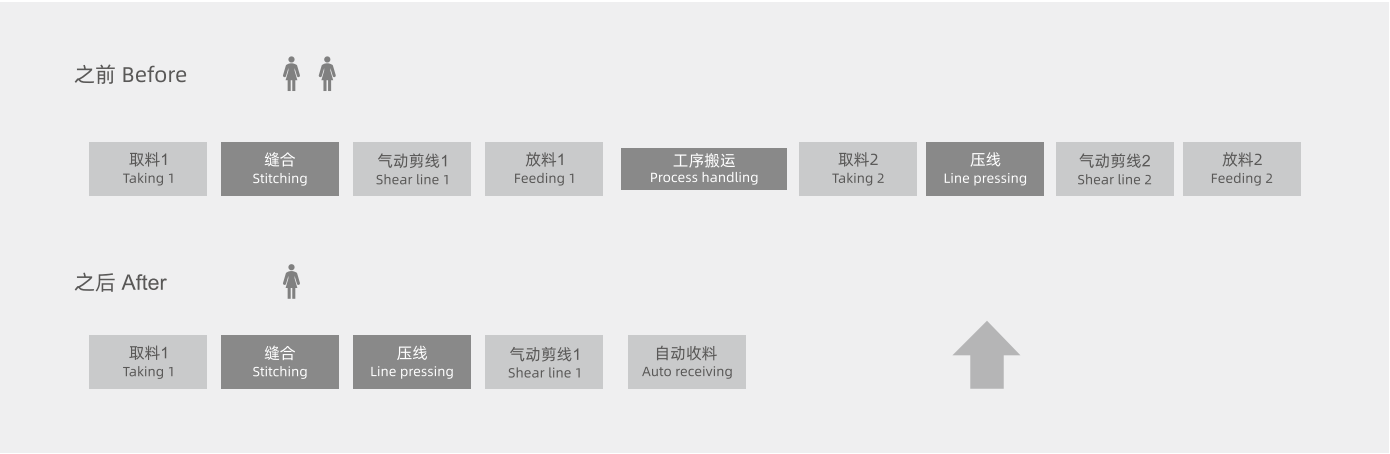

技术参数 | Technical parameters

型号 Model	项目 Project	参数 Parameter
LS7041A/B	电压	220V 50~60Hz
	气压	0.5~0.6MPa
	功率	3KW
	外形尺寸	1600*1100*1650mm
	装箱尺寸	1525*1225*1450mm
	净重	330kg
	毛重	394kg
	工作压力	0.45Mpa-0.75Mpa
	效率	15S左右/片
	适应范围 To adapt to the scope of	各类需缝合压线的工序 All kinds of stitching and pressing processes 注：弧形过大的工序不适用衣片有拼接骨缝的不适用 Note: the process with too large arc is not Applicable to clothes with patchwork seam.

*以上型号仅供参考， 详细情况请咨询。
The above types are only for reference, and you can consult local distributors for details.

*为了改良， 产品规格若有变更， 恕不另行通知。为安全起见， 使用之前， 请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

LS7041A/B

缝合压线一体机（二合一）
Stitching and pressure line two in one



浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址：宁波市海曙区光文路500号 电话(TEL)：0574-8742 3969 0574-8388 5719
Address:No 500 RD Guangwen District Haishu Ningbo Zhejiang,China E-mail: wuhanqiao66@163.com web:www.lensh.net



应用范围 | Application

主要应用于各类针织梭织面料的合缝和压明线。
Mainly used in all kinds of knitted fabrics seam and press line.



应用工艺 | Application process

应对不同工艺，提供链式和锁式两款机型
Responding to different processes,it offers two models with chain and lock





应对针织、休闲服装的缝合压线工艺 ~ 后肩 后档 侧袖 大身侧缝等
Respond to casual wear stitching and pressing process,back shoulder,bak crotch,side sleeves,side seams,etc



应对针织、休闲服装的缝合压线工艺 ~ 后肩 后档 侧袖 大身侧缝等
Respond to casual wear stitching and pressing process,back shoulder,bak crotch,side sleeves,side seams,etc


规格范围 | Specification range

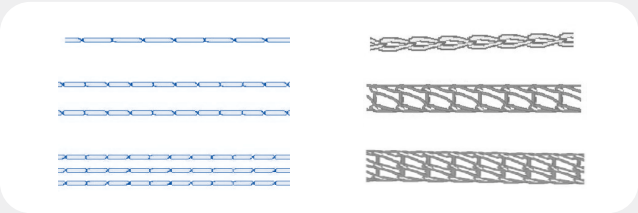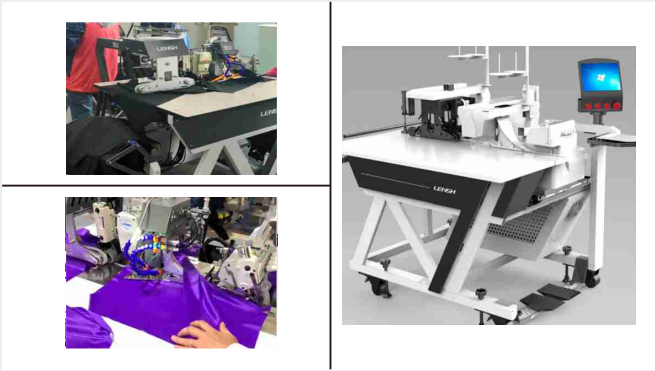


不适用工艺：
合袖压线 裤裆十字缝 110度以下弧度合缝 裤缝侧边带口袋压线
Non-applicable process: Crotch cross
seam less than 110 degrees seam side pocket line

效率分析 | Efficiency analysis

90~110%

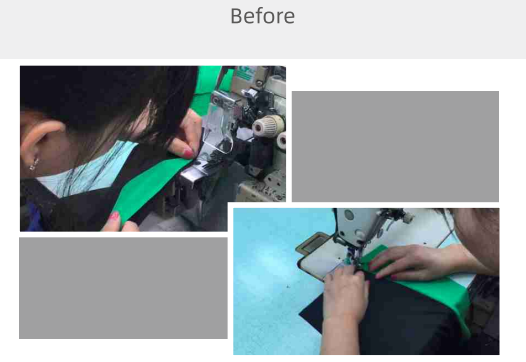

2道工序 2个人 效率低
2 processes 2 workers and low efficiency

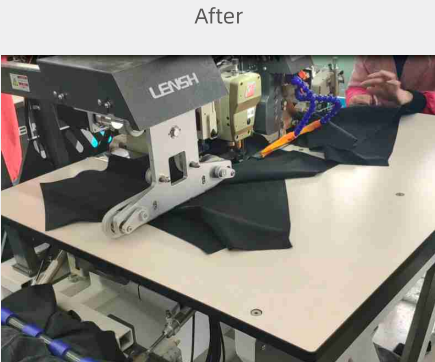

缝合压线一次完成
Stitching and pressing are completed at one time