





KS001A Auto Rib Cuff Joining Machine







Auto cutting pieces picking design



Auto collection of finished products

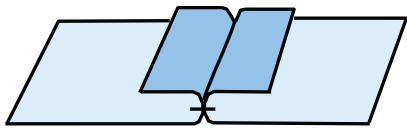

Open seam illustration



Front of finished product of cuffs

Used for rib cuff and rib bottom of pants. Highly automatic, stable production can be achieved with simple settings.

- Fully automatic for bulk operation. With cutting pieces loading on the material placement area (210mm stacking height), and the machine will automatically complete the process of feeding, sewing, and collecting pieces.
- Open seam, to make sure the excellent appearance and steady quality.
- Identify the size of cutting pieces with sensors, to realize size and pattern auto changeover.
- The output can reach 85~95 pairs per hour.

APPLICATIONS

Styles

Rib cuff
Rib bottom of pants

Fabrications

Common rib fabric

Size and Dimensions

Cutting pieces height of cuff / bottom (pants) : 80~160mm

Cutting pieces width of cuff / bottom (pants, full circumference): 200~320mm

qonvolv
SYSTEMS

Quaternion Hong Kong Limited
13/F, Harbour Center, 25 Harbour Road
Wanchai, Hong Kong

www.qonvolv.com
qonvolvSystems@qonvolv.com
86-757-88888070



SPECIFICATIONS



Sewing Machine Head
JUKI DDL-8000A



Dimensions (mm)
L: 1,800 x W: 900 x H: 1,400



Stitch Type
Lockstitch (#301)



Power (W)
500



Compressed Air Requirement (Mpa)
0.5



Power Supply (V)
AC 220 (50Hz)



Needle
DBx1 KN



Max. Sewing Speed (rpm)
3,000



Changeover Time (m)
10



Weight (kg)
500



Output (pairs/hr)
85~95